

# DuPont™ GreenTape™ 9K7

LOW TEMPERATURE CO-FIRED CERAMIC SYSTEM

## Technical Data Sheet

### Product Description

The DuPont™ GreenTape™ 9K7 low temperature co-fired ceramic (LTCC) system is comprised of a low loss, co-fireable glass-ceramic dielectric tape and compatible gold and silver conductors. The dielectric tape is both cadmium and lead free\* and ideally suited for applications requiring low loss at frequencies in the high GHz range:

- Advanced high frequency applications
- Wireless and mobile communications
- High density multilayer interconnect for high speed digital applications

### Product Benefits

The GreenTape™ 9K7 system provides a complete co-fireable system of gold, silver and resistive components having excellent low loss properties at frequencies in excess of 100 GHz:

- Co-fire processing and re-fire stability
- Cadmium and lead free\* tape
- Low temperature brazing
- External cavities
- Buried component integration

\*Cadmium and lead “free” as used herein means that cadmium and lead are not an intentional ingredients in and are not intentionally added to the referenced product. Trace amounts however may be present.

### Processing

For detailed recommendations on the use of the GreenTape™ 9K7 low temperature co-fired ceramic (LTCC) system, consult the DuPont™ GreenTape™ LTCC Design Guide. For compatible post fired and co-fired conductor compositions, consult the DuPont™ GreenTape 9K7 Product Selector Guide.

### Printing

Compatible co-fireable thick film compositions are printed directly on preconditioned GreenTape™ 9K7 green sheets using appropriate thick film screen printing methods.

### Typical Properties

Physical Property	Value
Unfired thickness, (um)	127, +/- 9 (9K7)
	254, +/- 14 (9K7X)
X, Y, shrinkage, (%) <sup>1</sup>	9.1, +/- 0.3
Z shrinkage, (%) <sup>1</sup>	11.8, +/- 0.5
TCE, (23° - 300° C)	4.4
Density, (g/cm <sup>3</sup> )	3.1
Camber, (um / 25 mm)	25
Surface roughness, (um)	0.52
Thermal conductivity, (W / m-K)	4.6
Flexural strength, (MPa)	230
Young's modulus, (GPa)	145
Poisson's ratio	0.25

Electrical Property	Value
Dielectric constant, (10 GHz) <sup>2</sup>	7.1, +/- 0.2
Loss tangent, (10 GHz) <sup>2</sup>	0.0010
Insulation resistance, (Ohms)	> 10 <sup>12</sup>
Breakdown voltage, (kV / 25 um)	>= 1100
<sup>1</sup> : Isostatic lamination, 3000 psi, 70° C, 10 minutes	
<sup>2</sup> : split cavity measurement method	

The above tables show the anticipated typical physical and electrical properties for GreenTape™ 9K7 based on specific controlled experiments in our labs and are not intended to represent the product specifications, details of which are available upon request.

A vacuum stone or other support structure which distributes a uniform vacuum is recommended to secure the green sheet to the printer's stage plate. Printing should be performed in a clean, well ventilated area. Optimum printing characteristics are generally achieved when the room and paste container temperatures are in the 20° to 23°C range.

### Drying

Allow conductor prints to level for 5 to 10 minutes at room temperature and then dry in a well ventilated oven or conveyor dryer for 5 minutes at 100°C. Do not over-dry.

### Lamination

Collate, stack and laminate multiple sheets of the printed circuit patterns according to the recommended processing parameters detailed in the DuPont™ GreenTape™ LTCC Design Guide.

Typical lamination parameters are 3000 psi at 70°C for 10 minutes. Lamination pressures may vary slightly based upon part design and the individual tape lot shrinkage factors.

### Firing

Fire in a well ventilated conveyor or static furnace. Air flows and extraction rates should be optimized to ensure that oxidizing conditions exist within the muffle and that no exhaust gases enter the room.

GreenTape™ 9K7 requires the use of dedicated, specially coated setters in order to prevent parts from sticking during firing.

The initial fire/co-fire should use the recommended 26.5 hr. profile. For further information regarding firing profiles, furnace recommendations and setter tile choices, please contact your local DuPont Technical Service Representative.

### Post Fire Processing


Compatible post fired materials are printed directly on the co-fired GreenTape™ 9K7 laminate surface and fired at the recommended post fire profile.

### Storage and Shelf Life

Containers should be tightly sealed and stored in a clean, stable environment at room temperature (<25°C). The shelf life of the material, in unopened containers, is six months from the date of shipment. Some settling of solids may occur and compositions should be thoroughly mixed prior to use.

### Safety and Handling

For Safety and Handling information pertaining to this product, refer to the Material Safety Data Sheet (MSDS).

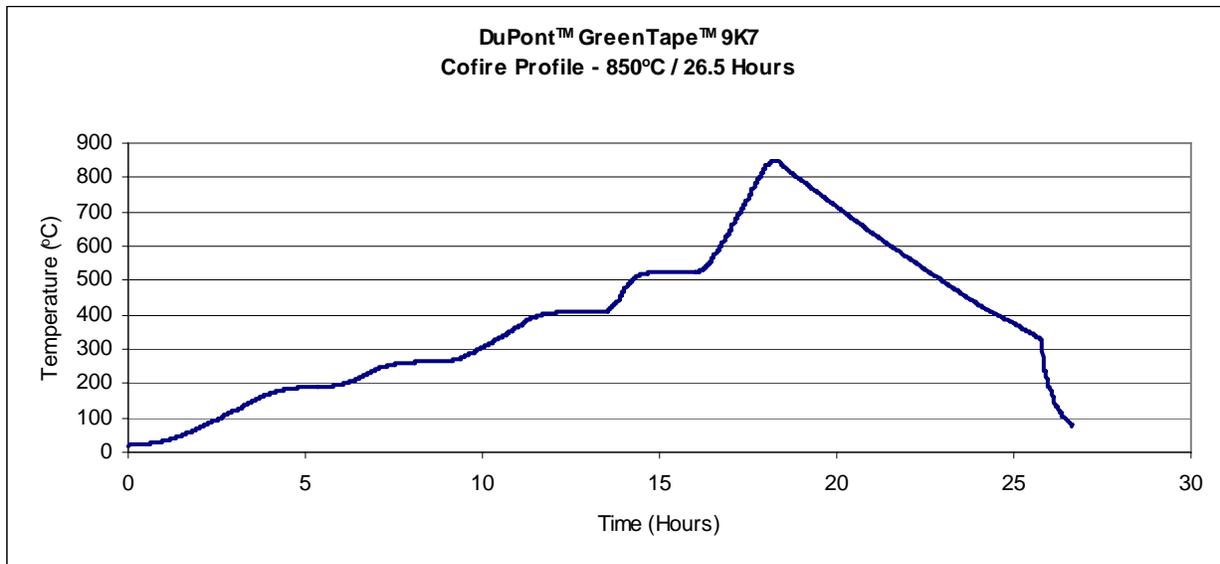

The miracles of science™

For more information on DuPont™ GreenTape™ 9K7 low temperature co-fired ceramic system or other DuPont Microcircuit Materials products, please contact your local representative:

Americas

DuPont Microcircuit Materials  
14 T.W. Alexander Drive  
Research Triangle Park, NC 27709  
Tel.: 800-284-3382

Europe

Du Pont (U.K.) Limited  
Coldharbour Lane  
Bristol BS16 1QD  
U.K.  
Tel.: 44-117-931-3191

Asia

DuPont Kabushiki Kaisha  
Sanno Park Tower, 11-1  
Nagata-cho 2-chome  
Chiyoda-ku, Tokyo 100-611  
Japan  
Tel.: 81-3-5521-8650

DuPont Taiwan Ltd  
45, Hsing-Pont Road,  
Taoyuan, Taiwan 330  
Tel.: 886-3-377-3616

DuPont China Holding Co. Ltd  
Bldg 11, 399 Keyuan Rd., Zhangji Hi-Tech Park,  
Pudong New District, Shanghai 201203, China  
Tel.: 86-21-6386-6366 ext.2202

DuPont Korea Inc.  
3-5th Floor, Asia tower #726,  
Yeoksam-dong, Gangnam-gu  
Seoul 135-719, Korea  
Tel.: 82-10-6385-5399

E. I. DuPont India Private Limited  
7th Floor, Tower C, DLF Cyber Greens,  
Sector-25A, DLF City, Phase-III,  
Gurgaon 122 002 Haryana, India  
Tel.: 91-124-4091818

Du Pont Company (Singapore) Pte Ltd  
1 HarbourFront Place, #11-01  
HarbourFront Tower One,  
Singapore 098633  
Tel.: 65-6586-3022

<http://mcm.dupont.com>

MCM9K7(10/2009)

Copyright © 2009 DuPont. All rights reserved. The DuPont Oval, DuPont™, The miracles of science™, Green Tape™ and all products or words denoted with ® or ™ are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates ("DuPont"). NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF DUPONT.

Caution: Do not use in medical applications involving implantation in the human body or contact with internal body fluids or tissue unless the product is provided by DuPont under a formal written contract consistent with the DuPont Policy Regarding Medical Applications of DuPont Materials H-50103-2 ("Medical Applications Policy") and which expressly acknowledges the contemplated use. For additional information, please request a copy of DuPont Medical Caution Statement H-50102-2 and the DuPont Medical Applications Policy.

The information provided herein is offered for the product user's consideration and examination. While the information is based on data believed to be reliable, DuPont makes no warranties, expressed or implied as to the data's accuracy or reliability and assumes no liability arising out of its use. The data shown are the result of DuPont laboratory experiments and are intended to illustrate potential product performance within a given experimental design under specific, controlled laboratory conditions. While the data provided herein falls within anticipated normal range of product properties based on such experiments, it should not be used to establish specification limits or used alone as the basis of design. It is the product user's responsibility to satisfy itself that the product is suitable for the user's intended use. Because DuPont neither controls nor can anticipate the many different end-uses and end-use and processing conditions under which this information and/or the product described herein may be used, DuPont does not guarantee the usefulness of the information or the suitability of its products in any given application. Users should conduct their own tests to determine the appropriateness of the products for their particular purpose.

The product user must decide what measures are necessary to safely use the product, either alone or in combination with other products, also taking into consideration the conditions of its facilities, processes, operations, and its environmental, health and safety compliance obligations under any applicable laws.

This information may be subject to revision as new knowledge and experience become available. This publication is not to be taken as a license to operate under, or recommendation to infringe any patent.



*The miracles of science™*